




T8030-25

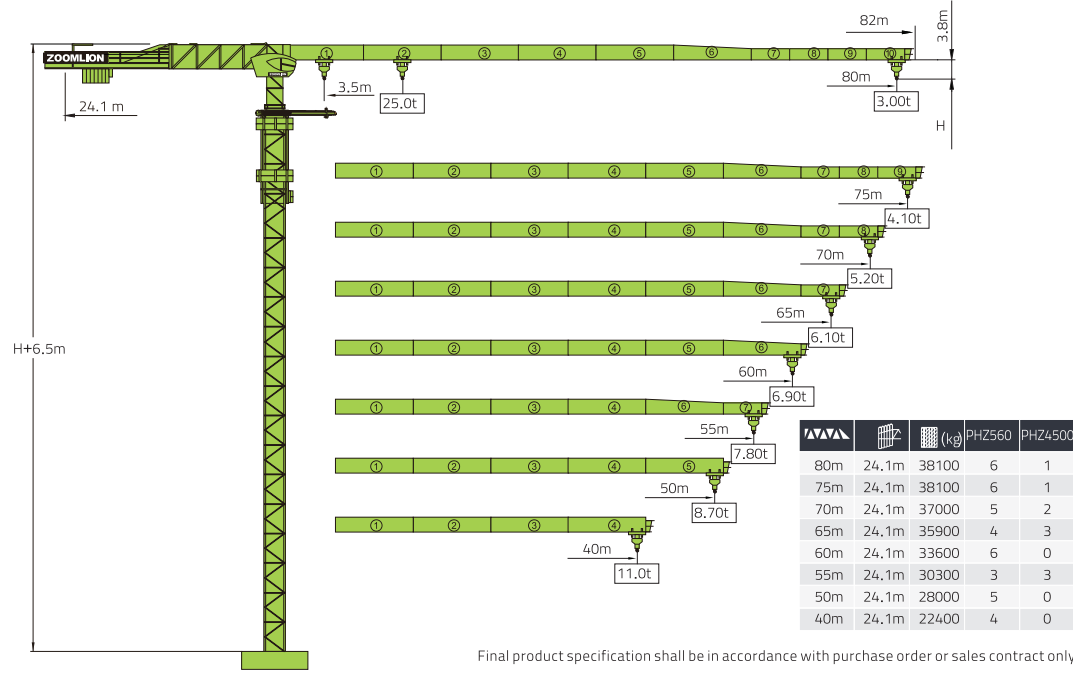

塔身 Masts / 反力 Reactions / T8030-25U

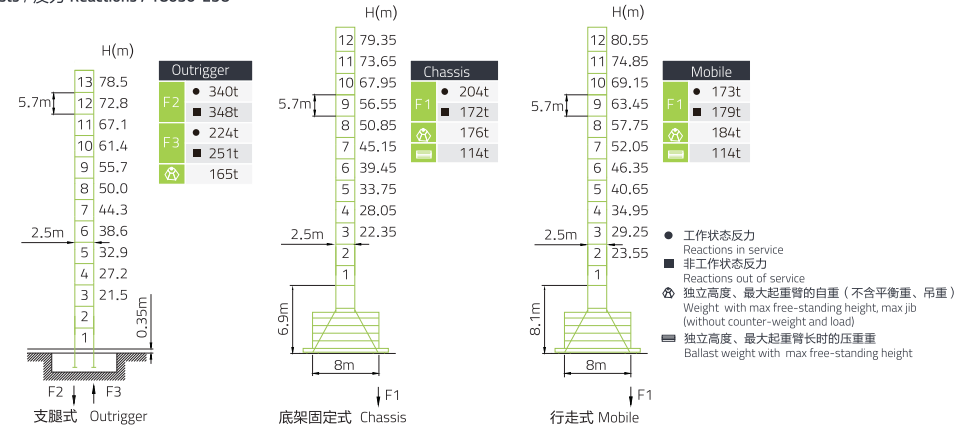

附着 Anchorages / T8030-25U

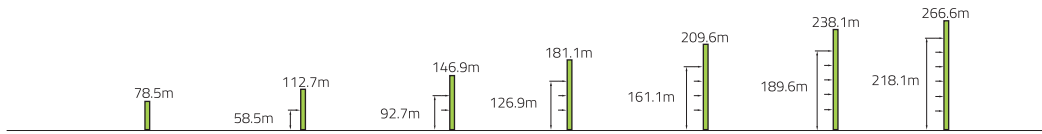

400+cm

T8030-25

起重特性 Load Diagrams

		Max.Capacity m/t	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0
80 (R=82)		3.5~27.6/12.50	12.50				11.30	9.36	7.92	6.81	5.93	5.21	4.62	4.12	3.69	3.32	3.00
		3.5~14.8/25.00	25.00	24.49	17.09	12.84	10.07	8.13	6.69	5.58	4.70	3.98	3.39	2.89	2.46	2.09	1.77
75 (R=77)		3.5~31.6/12.50	12.50				11.06	9.40	8.12	7.11	6.28	5.60	5.02	4.53	4.10		
		3.5~16.8/25.00	25.00	20.18	15.26	12.07	9.83	8.17	6.89	5.88	5.05	4.37	3.79	3.30	2.87		
70 (R=72)		3.5~34.9/12.50	12.50				12.44	10.60	9.18	8.06	7.14	6.39	5.75	5.20			
		3.5~18.5/25.00	25.00	22.67	17.23	13.69	11.21	9.37	7.95	6.83	5.91	5.15	4.52	3.97			
65 (R=67)		3.5~36.4/12.50	12.50				11.18	9.70	8.52	7.56	6.77	6.10					
		3.5~19.3/25.00	25.00	23.88	18.18	14.48	11.88	9.95	8.47	7.29	6.33	5.54	4.87				
60 (R=62)		3.5~37.0/12.50	12.50				11.38	9.88	8.68	7.71	6.90						
		3.5~19.5/25.00	25.00	24.29	18.51	14.75	12.11	10.15	8.64	7.45	6.48	5.67					
55 (R=57)		3.5~37.3/12.50	12.50				11.51	9.99	8.78	7.80							
		3.5~19.7/25.00	25.00	24.56	18.72	14.92	12.26	10.28	8.76	7.55	6.57						
50 (R=52)		3.5~37.0/12.50	12.50				11.41	9.90	8.70								
		3.5~19.6/25.00	25.00	24.35	18.55	14.78	12.14	10.18	8.67	7.47							
40 (R=42)		3.5~35.9/12.50	12.50				11.00										
		3.5~19.0/25.00	25.00	23.50	17.88	14.23	11.67	9.77									

传动机构 Mechanisms

配置 Configuration			bd			bd			kW	
			III	IV	V	III	IV	V		
 起升 Hoisting	QP2580A	m/min	27	53	80	13.5	27	40	63	650m(6 layers)
		t	12.5	6.25	1	25	12.5	2		
 回转 Slewing	HVV145B1.130B×2 HVV145B2.130B×1	r/min	0~0.7						3×145 N.m	① 超出咨询我们 Consultus if overtop
 变幅 Trolleying	BP110A	m/min	0~100						11	
 行走 Travelling	ZAK52-B ZBK52-B	m/min	0~25						6×5.2	
	380V(±10%)50Hz	96.5+6×5.2kW								