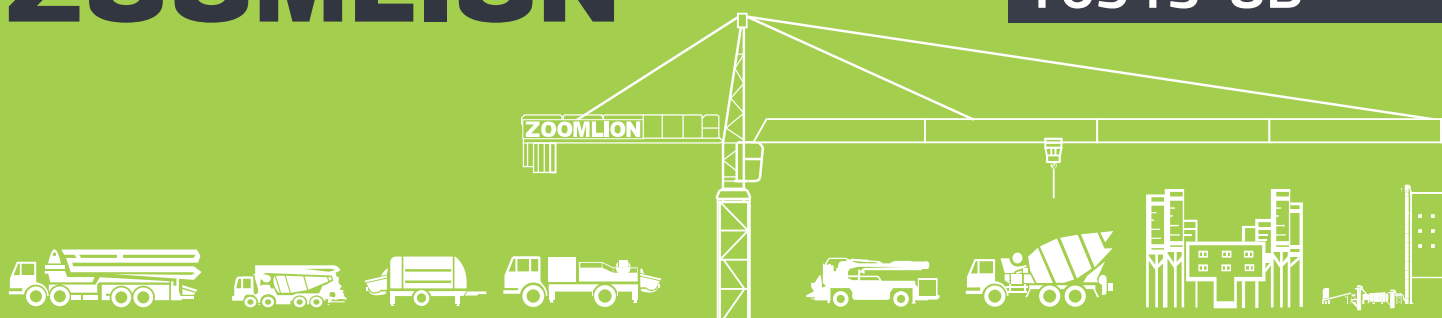
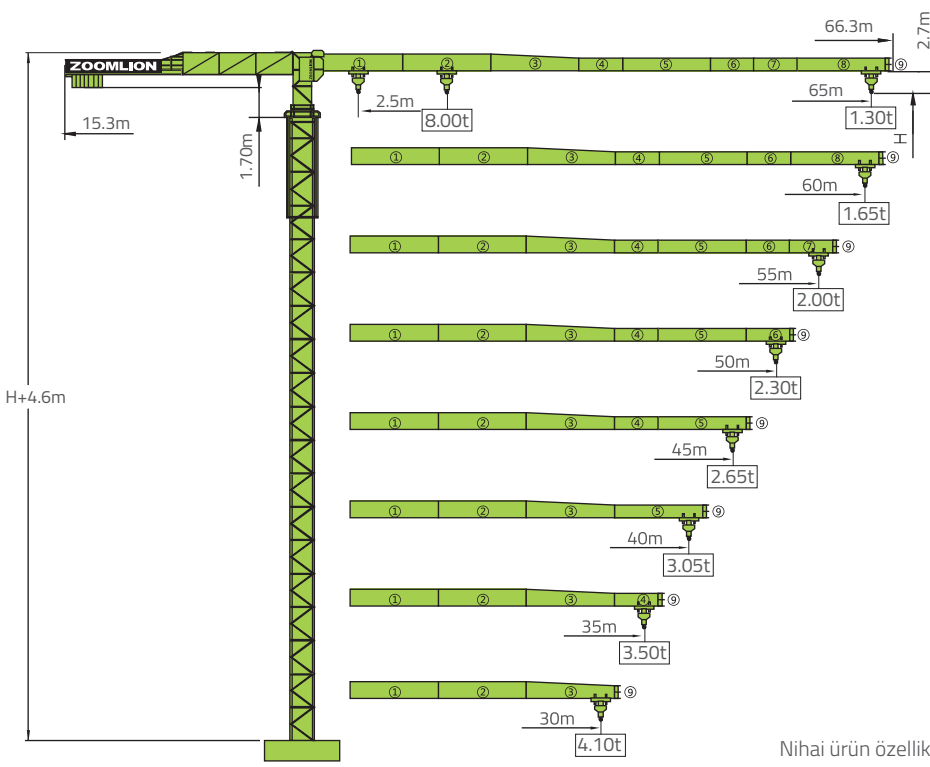


**T6513-8B**

**T6513-8B**

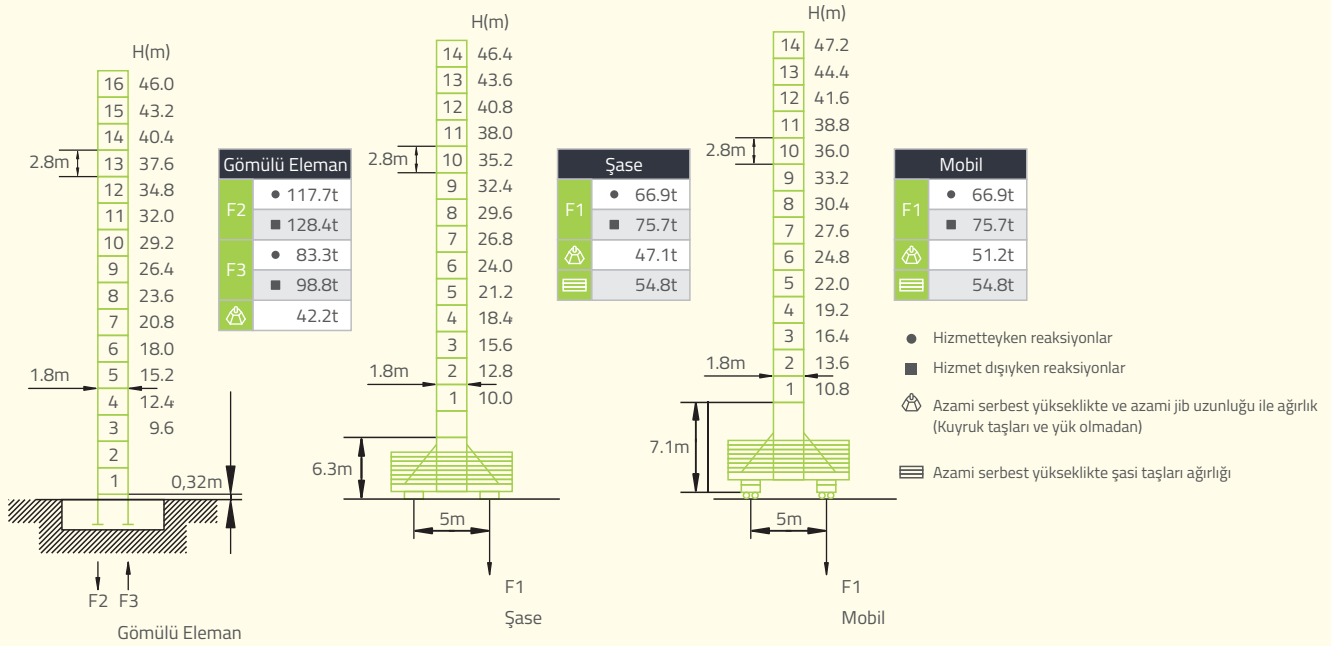




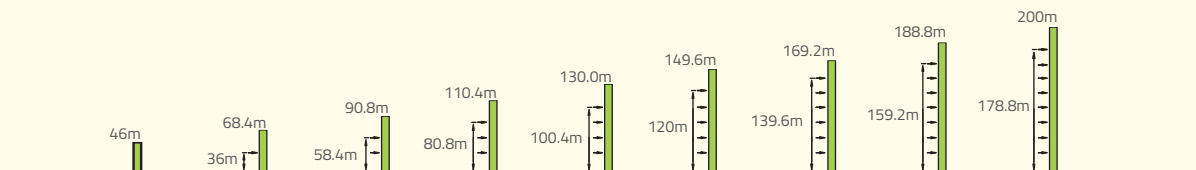
| Kuyruk Taşları |       | 2900 - 1800 KG |         |         |
|----------------|-------|----------------|---------|---------|
| ▲▲▲▲           | ■     | (kg)           | PHZ2900 | PHZ1800 |
| 65m            | 15.3m | 17400          | 6       | 0       |
| 60m            | 15.3m | 16300          | 5       | 1       |
| 55m            | 15.3m | 16300          | 5       | 1       |
| 50m            | 15.3m | 14500          | 5       | 0       |
| 45m            | 15.3m | 13400          | 4       | 1       |
| 40m            | 15.3m | 11600          | 4       | 0       |
| 35m            | 15.3m | 10500          | 3       | 1       |
| 30m            | 15.3m | 8700           | 3       | 0       |

Nihai ürün özellikleri sipariş emri veya satış sözleşmesine göre olacaktır.

## Mastlar / Reaksiyonlar




## Bina Bağlantıları








## Yük Tabloları

|  |    | Azami kapasite (m/t) | 2.5~15 | 20   | 25   | 30   | 35   | 40   | 45   | 50   | 55   | 60   | 65   |
|-----------------------------------------------------------------------------------|----|----------------------|--------|------|------|------|------|------|------|------|------|------|------|
| 65<br>(R=66.3)                                                                    | б  | 2.5~28.88/4.00       | 4.00   |      |      | 3.82 | 3.14 | 2.64 | 2.25 | 1.94 | 1.69 | 1.48 | 1.30 |
|                                                                                   | бб | 2.5~15.93/8.00       | 8.00   | 6.13 | 4.69 | 3.74 | 3.07 | 2.57 | 2.18 | 1.87 | 1.61 | 1.40 | 1.23 |
| 60<br>(R=61.3)                                                                    | б  | 2.5~31.00/4.00       | 4.00   |      |      | 3.44 | 2.90 | 2.48 | 2.15 | 1.88 | 1.65 |      |      |
|                                                                                   | бб | 2.5~17.08/8.00       | 8.00   | 6.66 | 5.11 | 4.09 | 3.37 | 2.83 | 2.41 | 2.07 | 1.80 | 1.58 |      |
| 55<br>(R=56.3)                                                                    | б  | 2.5~32.40/4.00       | 4.00   |      |      | 3.64 | 3.07 | 2.63 | 2.28 | 2.00 |      |      |      |
|                                                                                   | бб | 2.5~17.84/8.00       | 8.00   | 7.01 | 5.39 | 4.32 | 3.56 | 3.00 | 2.56 | 2.21 | 1.93 |      |      |
| 50<br>(R=51.3)                                                                    | б  | 2.5~32.56/4.00       | 4.00   |      |      | 3.66 | 3.09 | 2.65 | 2.30 |      |      |      |      |
|                                                                                   | бб | 2.5~17.93/8.00       | 8.00   | 7.05 | 5.42 | 4.35 | 3.58 | 3.02 | 2.58 | 2.23 |      |      |      |
| 45<br>(R=46.3)                                                                    | б  | 2.5~32.55/4.00       | 4.00   |      |      | 3.66 | 3.09 | 2.65 |      |      |      |      |      |
|                                                                                   | бб | 2.5~17.92/8.00       | 8.00   | 7.05 | 5.42 | 4.34 | 3.58 | 3.02 | 2.58 |      |      |      |      |
| 40<br>(R=41.3)                                                                    | б  | 2.5~32.23/4.00       | 4.00   |      |      | 3.61 | 3.05 |      |      |      |      |      |      |
|                                                                                   | бб | 2.5~17.75/8.00       | 8.00   | 6.97 | 5.35 | 4.29 | 3.54 | 2.98 |      |      |      |      |      |
| 35<br>(R=36.3)                                                                    | б  | 2.5~31.43/4.00       | 4.00   |      |      | 3.50 |      |      |      |      |      |      |      |
|                                                                                   | бб | 2.5~17.31/8.00       | 8.00   | 6.77 | 5.20 | 4.16 | 3.43 |      |      |      |      |      |      |
| 30<br>(R=31.3)                                                                    | б  | 2.5~30.00/4.00       | 4.00   |      |      |      |      |      |      |      |      |      |      |
|                                                                                   | бб | 2.5~17.11/8.00       | 8.00   | 6.63 | 5.11 | 4.10 |      |      |      |      |      |      |      |

## Mekanizmalar

|                                                                                     |                |  |                              |  |                                                                                                                                                                                                                                                                       |                   |    |    |          |
|-------------------------------------------------------------------------------------|----------------|--|------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----|----|----------|
|  | Dönüş          |  | HPW55F1.130B<br>HPW55F2.130B |  | <br>Kanca<br>37/37kW<br><br>610m Ø (6 kat sarım)<br>Ø<br>Aşması istenen yükseklik için danışın | Kanca<br>QP8100D2 |    |    |          |
|  | 0~0.6 d/dak    |  | 2x5.5kW                      |  |                                                                                                                                                                                                                                                                       | I                 | б  | 4t | 50m/dak  |
|                                                                                     | Şaryo          |  | BP40B                        |  |                                                                                                                                                                                                                                                                       |                   | бб | 8t | 25m/dak  |
|  | 0~55 m/dak     |  | 4.0 kW                       |  |                                                                                                                                                                                                                                                                       | II                | б  | 2t | 100m/dak |
|                                                                                     | Yürüyüş        |  | ZA52-D<br>B52-D              |  |                                                                                                                                                                                                                                                                       |                   | бб | 4t | 50m/dak  |
|  | 380V(±%10)50Hz |  |                              |  | 52.0+2x5.2kW (Kule asansörü hariç)                                                                                                                                                                                                                                    |                   |    |    |          |

## Paket Listesi

| No. | Açıklama                             | Eskiz                                                                               | L(m)  | B(m) | H(m) | Parça Başı Ağırlık (t) | Adet |
|-----|--------------------------------------|-------------------------------------------------------------------------------------|-------|------|------|------------------------|------|
| 1   | Jib I                                |    | 10.23 | 1.58 | 2.36 | 2.64                   | 1    |
| 2   | Jib II                               |    | 10.22 | 1.33 | 2.17 | 1.70                   | 1    |
| 3   | Jib III                              |                                                                                     | 5.22  | 1.33 | 1.72 | 0.62                   | 1    |
| 4   | Jib IV                               |                                                                                     | 10.20 | 1.33 | 1.71 | 0.90                   | 1    |
| 5   | Jib V                                |                                                                                     | 5.16  | 1.33 | 1.67 | 0.38                   | 1    |
| 6   | Jib VI                               |                                                                                     | 5.15  | 1.33 | 1.64 | 0.32                   | 1    |
| 7   | Jib VII                              |                                                                                     | 10.12 | 1.33 | 1.63 | 0.48                   | 1    |
| 8   | Jib VIII                             |    | 10.18 | 1.33 | 2.13 | 1.38                   | 1    |
| 9   | Jib IX                               |    | 0.82  | 1.60 | 1.41 | 0.13                   | 1    |
| 10  | Kuyruk Jib - 1                       |    | 8.57  | 1.36 | 2.27 | 2.35                   | 1    |
| 11  | Kuyruk Jib - 2                       |    | 8.07  | 1.49 | 0.46 | 1.71                   | 1    |
| 12  | Dönüş Grubu                          |    | 1.96  | 2.34 | 2.50 | 3.83                   | 1    |
| 13  | Şaryo                                |   | 1.77  | 1.57 | 0.92 | 0.30                   | 1    |
| 14  | Kanca                                |  | 1.07  | 0.34 | 1.61 | 0.40                   | 1    |
| 15  | Kabin                                |  | 2.08  | 1.30 | 2.23 | 0.70                   | 1    |
| 16  | Vinç Mekanizması                     |  | 1.82  | 2.03 | 1.05 | 2.72                   | 1    |
| 17  | Geçiş Mastı                          |  | 2.53  | 2.53 | 2.05 | 1.08                   | 1    |
| 18  | Tırmanma Ekipmanı                    |  | 6.49  | 2.49 | 2.55 | 4.07                   | 1    |
| 19  | Mast A/B                             |  | 2.80  | 2.00 | 1.96 | 0.98                   | 15   |
| 20  | Gömülü Eleman İçin Temel Mastı       |  | 2.83  | 2.30 | 2.30 | 1.23                   | 1    |
| 21  | Cıvatalı Eleman İçin Temel Mastı     |  | 2.83  | 2.30 | 2.30 | 1.23                   | 1    |
| 22  | Mobil Alt Taşıyıcı Şase - Tam Kiriş  |  | 7.52  | 1.00 | 0.85 | 1.30                   | 1    |
| 23  | Mobil Alt Taşıyıcı Şase - Yarımkiriş |  | 3.63  | 0.52 | 0.83 | 0.62                   | 2    |
| 24  | Yürüyüş Takımı                       |  | 1.22  | 1.34 | 0.95 | 0.82                   | 2    |