



D1100-63

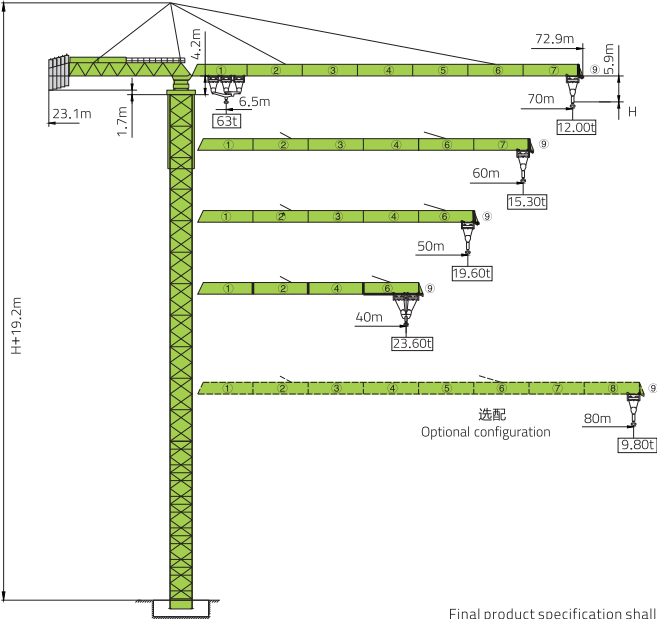


Final product specification shall be in accordance with purchase order or sales contract only

		(kg)	P-H13750	P-H29500	P-H27500
80m	23m	68750	5	0	0
70m	23m	62500	4	0	1
60m	23m	52000	2	1	2
50m	23m	45750	1	1	3
40m	23m	34000	0	2	2

塔身 Masts / 反力 Reactions

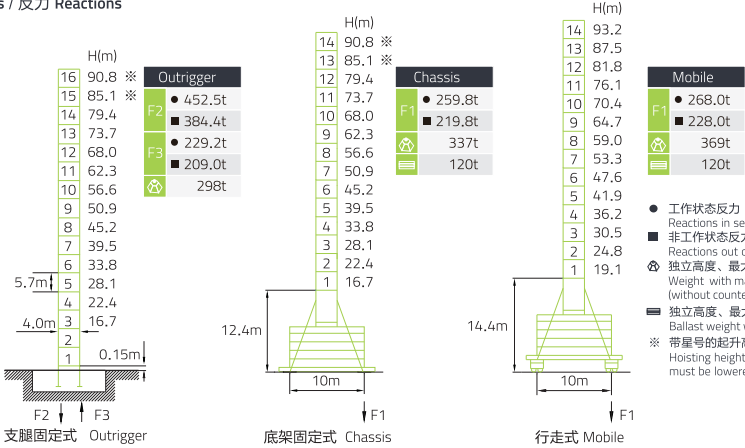

附着 Anchorages

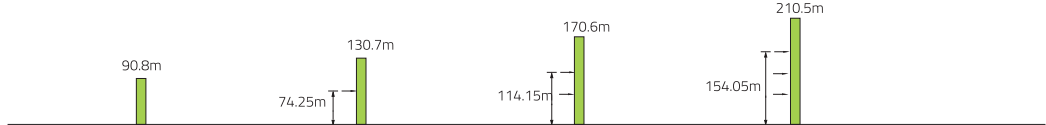

D1100-63

起重特性 Load Diagram

 R(m)		Max.Capacity m/t	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0
80 (R=82.9)	b	6.5~43.48/21	21.00						20.16	17.75	15.80	14.19	12.83	11.67	10.67	9.80
	bb	6.5~23.06/42	42.00		38.02	30.33	24.97	21.02	17.98	15.58	13.63	12.01	10.66	9.50	8.50	7.63
	bbb	6.5~16.05/63	63.00	47.57	35.62	27.93	22.57	18.62	15.58	13.18	11.23	9.61	8.26	7.10	6.10	5.23
70 (R=72.9)	b	6.5~44.90/21	21.00						20.70	18.20	16.20	14.60	13.19	12.00		
	bb	6.5~23.77/42	42.00		39.49	31.54	26.00	21.91	18.77	16.28	14.27	12.60	11.20	10.00		
	bbb	6.5~16.53/63	63.00	49.45	37.09	29.14	23.60	19.51	16.37	13.88	11.87	10.20	8.79	7.60		
60 (R=62.9)	b	6.5~46.59/21	21.00						19.10	17.00	15.30					
	bb	6.5~24.63/42	42.00		41.25	32.99	27.22	22.97	19.71	17.13	15.03	13.30				
	bbb	6.5~17.10/63	63.00	51.69	38.85	30.59	24.82	20.57	17.31	14.73	12.63	10.90				
50 (R=52.9)	b	6.5~47.25/21	21.00						19.60							
	bb	6.5~25.16/42	42.00			33.89	27.98	23.63	20.29	17.65						
	bbb	6.5~17.46/63	63.00	53.07	39.93	31.47	25.58	21.23	17.89	15.25						
40 (R=42.9)	b	6.5~40.00/21	21.00													
	bb	6.5~25.16/42	42.00			33.87	27.98	23.63								
	bbb	6.5~17.46/63	63.00	53.07	39.93	31.47	25.58	21.23								

传动机构 Mechanisms

配置 Configuration			b			bb			bbb			kW	
			III	IV	V	III	IV	V	III	IV	V		
 起升 Hoisting	QPL4275	m/min	30.0	60.0	75.0	15.0	30.0	37.5	10.0	20.0	25.0	132	1070m① (8layers)
		t	21.0	10.5	4.0	42.0	21.0	8.0	63.0	31.5	22.0		
 回转 Slewing	HPW185F1.350A×2 (80m Jib) HPW185F1.350A×1 (80m Jib) HPW185F2.350A×1	r/min	0~0.6									3×18.5 (80m Jib) 2×18.5 (Others)	① 超出咨询我们 Consult us if overtop
 变幅 Trolleying	BP185	m/min	0~50									18.5	
 行走 Travelling	ZA110×2 ZB110×2	m/min	0~15									4×11	
	380V(±10%)50Hz	206.0+4×11.0kW(80m Jib) 187.5+4×11.0kW(Others)											